



Installation Instructions for your Natural Stone Above Counter Vessel Sink



Items needed for Installation:

- A quality 100% clear silicone sealer.
- A non-overflow plumbing tailpiece designed for vessel sinks.
- Soft cotton rag.

Directions:

NOTE: During the installation of this product, the only sealant or adhesive that is Manufacturer Approved is a 100% Silicone based product. Failure to use Kitchen and Bath 100% Silicone based products will VOID ALL manufacturer warranties and manufacturer finish warranties. Specifically, the use of Plumbers Putty is EXPRESSLY PROHIBITED and will VOID ALL manufacturer warranties and manufacturer finish warranties.

- Carefully remove your vessel from the packaging materials.
- Apply a small bead of silicone to the bottom side of the Vessel [FIG. A] approximately 1/4" back from the drain hole opening.
- Position the Vessel over the matching drain hole in your countertop. Carefully lower into place slowly working the sealant down until the Vessel contacts the countertop.
- Check the seal between the countertop and Vessel for any sealer that may have squeezed out. If sealer is visible, lift Vessel and remove the excess of countertop and Vessel with a soft cotton rag. Once excess sealer is removed reposition vessel to countertop.
- Remove the mounting nut and rubber beveled washer from the tailpiece drain. If your tailpiece came with a thin rubber washer for mounting under the flange, please discard.
- Apply a bead of silicone sealer under the mounting flange of the tailpiece and position into the drain hole of the Vessel. [FIG. B] Do not use plumbers putty under the flange for this may damage or discolor stone. Work into place by slowly pressing the tailpiece until it seats against Vessel. You should have a small amount of sealer squeezing out between the tailpiece flange and Vessel.

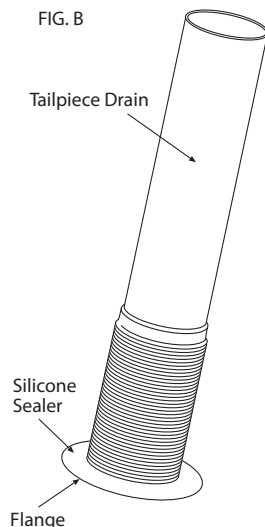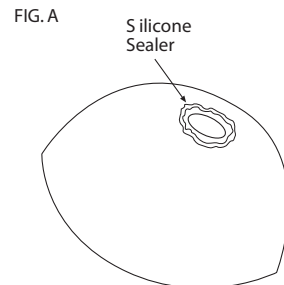

- While holding the tailpiece in place, slide the beveled rubber washer onto the tailpiece beveled side up. Follow with a metal washer (if provided) and mounting nut.
- Tighten mounting nut. Nut torque just needs to be enough to seat tailpiece flange firmly into Vessel. Do not over tighten. Remove any excess sealer inside the Vessel with a soft cotton rag.
- Your sink is now installed and ready for the drain trap to complete the drain installation. Allow 12 to 24 hours for sealer to cure before use.

Any questions with the installation of your new Lautus Marble Vessel Sink, please call us at (877) 322-3600. We will be happy to assist you.



Copyrights 2004 D'Vontz L.L.C.

LIMITED WARRANTY

- **Use of any cleaning products other than those suggested by D'Vontz will void warranty. See care and installation instructions included with product or available on the web at www.dvontz.com.**
- **Use of "plumber's putty" on any product will void all warranties!**
- All D'Vontz products are warranted to the original purchaser to be free of defects in material and workmanship for one year from the purchase date.
- This limited warranty only applies to the original purchaser of our product. Proof of Purchase in the form of the original sales receipt will be required for any warranty claim.
- This limited warranty does not cover any costs associated with a product's removal and/or reinstallation, including labor, materials or damage to surrounding products or goods.
- There is no warranty on copper sink or tub patinas. Please refer to the care instructions included with these products.

D'Vontz L.L.C.
 7208 E. 38th St., Tulsa, Oklahoma 74145
 800-322-3600 ph 918-622-3649 fax

Stone Care *Don't's* and Recommended Products

Don't...use **vinegar** or **cleaners that contain acids or citrus products**...such as tile, tub, toilet and grout cleaners.

Don't...use **powder** cleansers, **soft cream** cleansers (Soft Scrub, etc.), **mildew/mold removers** (TileX, X14, etc.), **disinfectants** (Lysol, etc.) and **abrasive** nylon **scrub pads**.

There are available safe disinfectants that have been formulated that can be used around and on stone surfaces.

Don't...use **furniture polish** (Pledge, Jubilee, Endust, etc.) on stone surfaces.

Use a stone polish; this will help minimize staining and etching on furniture, counters and vanities.

Don't...use the cork and wood container protectors. These can cause severe stains

Recommended Products.....

If you use some basic care tips for your stone it will remain beautiful for many years to come. There are many Manufactures that offer quality stone care products. We recommend and use **Stone Care International** products for the stone that we sell. Our sinks include a basic care kit of cleaner, sealer and polish to help maintain your marble and granite. Maintaining your stone is as simple a process as maintaining any bath countertop and sink surface. For additional information please view: www.stonecare.com

Cleaning: **Recommended Daily / Weekly**

MARBAMIST... Counter/Vanity/Table Top Stone Spray Cleaner

A ready to use stone cleaner. It is a gentle premixed formula. Just spray it on wipe it off. This is USDA authorized and is ideal product for the kitchen to cleanup grease and as a general purpose cleaner This product is pH7 balanced.

Polishing: **Recommended Monthly**

INTERNATIONAL STONE POLISH...Protects and Polishes

A protective coating that will polish, and enhance the brilliant colors of natural stone. Not intended for floors use, the polish will protect and provide a natural gloss to stone countertops, vanities, walls, and stone furniture. Simply apply it to the surface by hand and polish with a soft dry cloth. The polish will also help prevent staining and etching on the surface by providing a durable protective barrier

Sealing: **Recommended Every Two Years**

SPRAY -N-SEAL...Prevents Staining and Discoloring

Water based penetrating sealer that protects natural stone surfaces from staining. It is wonderful for stone countertops, floors, walls, vanities and even grout. This below surface sealer is also ideal for sealing all types of masonry, stucco, concrete and sanded grout. It has a special blend of polymers that bond to the stone and creates a water and oil repellent membrane to prevent staining, yet it allows the stone to breathe and release moisture vapors. It is safe for interior and exterior use and is UL Classified for slip resistance. This stone sealer will not alter the color of any stone, tile or grout.